

DESCRIPTION

❖ CHARACTERS

Used as light box side light source. It uses the imported Mitsubishi optical lens, makes the light more uniformity and better quality

❖ APPLICATION AREA


- ❖ Video advertising display
- ❖ Mall, large advertising display
- ❖ High-grade LED advertising, display card
- ❖ High-end supermarket display shelves, traffic light layout

SUMMARY

❖ PCB size	600*38.4mm
❖ Emitting angle	13°39°
❖ Voltage	100-240V
❖ Color	White
❖ LED Q'ty	9pcs

CERTIFICATION


Certification types will increase, please contact our business.

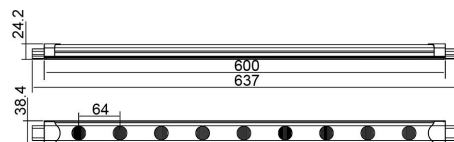


ITEM		MODEL
		HEM-0600-20W-6
LED Features	LED compound mode	6Cascade 1Parallel
	Minimum truncation size	--
	Lamp bead (center) spacing	64
	LED Part No	3030
	LED Chip No	LP
	LED current	1500mA
	Tc (k) Or Wavelength λd (nm)	6300K-7000K
	LED Color	White
	LED lumen	140LM
Technical Request	Working environment	-20~50 30%-70%
	storage condition	-20~50 30%-70%
	Work frequency	50/60Hz
	Work voltage range	100-240V
	Max input current	135±10%
	Output power	30±10%
	LED Lumen	1650±10%

There' re two type operation method for this LED strip , one is dimmable ,the other is not dimmable .
Dimming mode as below , without the dimmer ,LED strip will work none dimmable

①Connection mode if less than 5 LED strips/5

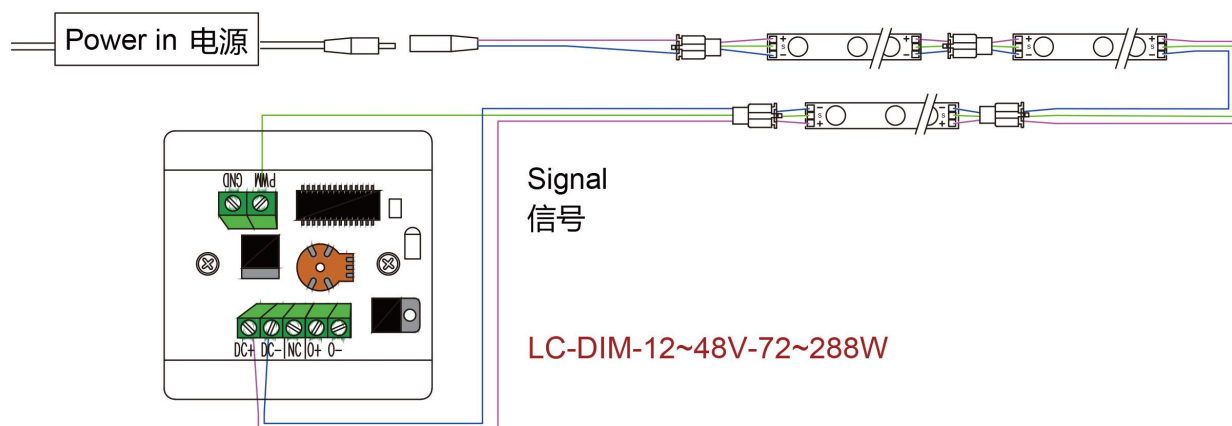

② Connection mode if more than 5 LED strips

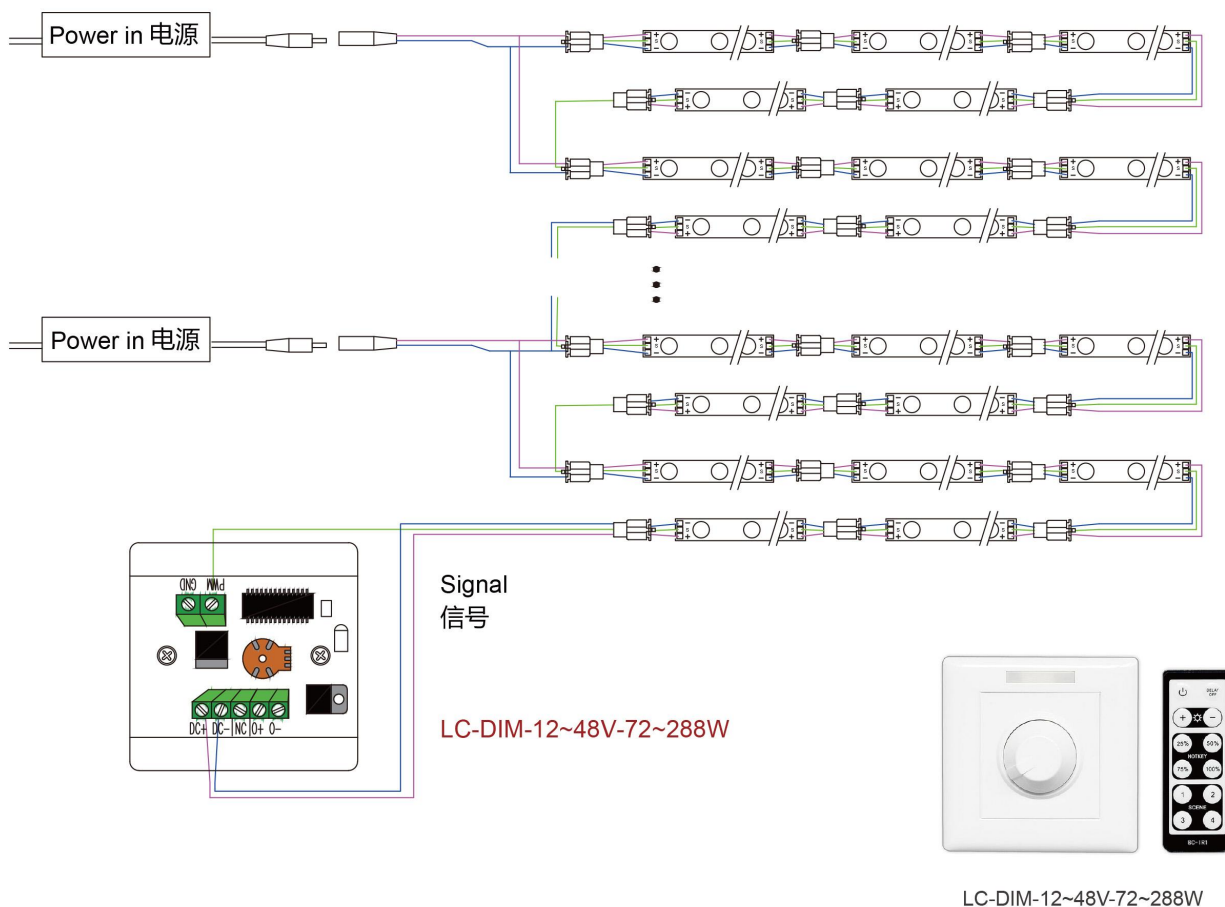

描述

特征

用作灯箱侧光源。它使用导入的三菱光学镜头，使光线更加均匀和更好的质量

应用领域



- ❖ 照明发光
- ❖ 灯箱应用
- ❖ 高档LED广告、展示牌光源

概要

- ❖ 产品尺寸 600*38.4mm
- ❖ 发光角度 13*39°
- ❖ 电压 100-240V
- ❖ 颜色 白色
- ❖ 灯珠数量 9颗


认证

认证种类将会增加，请联系本公司业务。

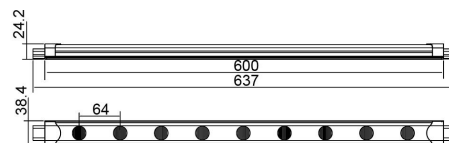

说明		型号
		HEM-0600-20W-9
LED参数	LED 组合方式	6 串 1 并
	最小截断尺寸	--
	灯珠 (中心) 间距	64
	LED 型号	3030
	LED 芯片	LP
	LED 电流	1500mA
	LED 波长或 (波长)	6300K-7000K
	LED 颜色	正白
	LED 流明	140LM
光学参数	工作环境温湿度	-20~50 30%-70%
	储存条件温湿度	-20~50 30%-70%
	工作频率	50/60Hz
	工作电压范围	100-240V
	输入电流	135±10%
	功耗	30±10%
	LED 流明	1650±10%

此款灯条可选调光和不调光方式选择，调光方式见下图，不调光直接去掉调光器即可
5条以内的灯条连接图

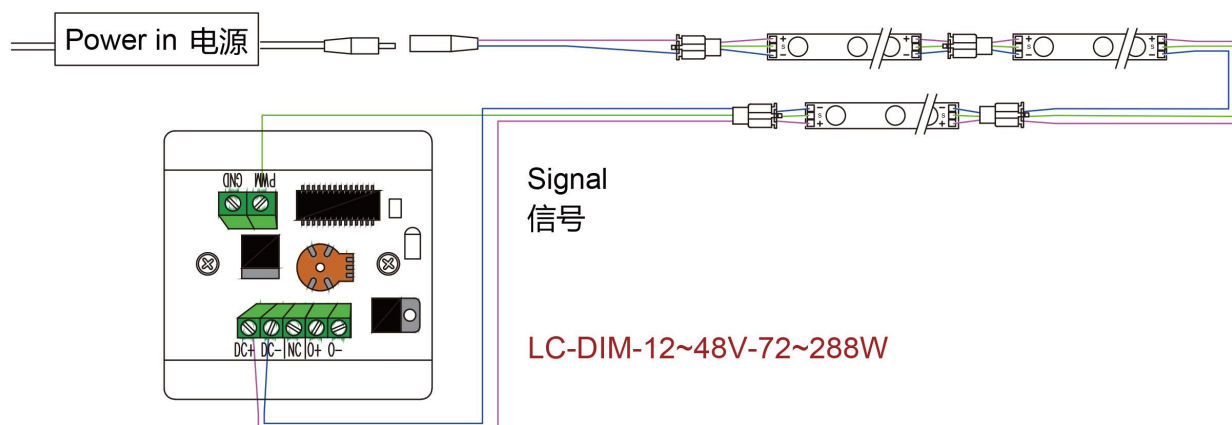

超过5条以上的灯条连接图

