

DESCRIPTION

❖ CHARACTERS

- ❖ New LED Module Panels adopt ultra-thin flexible circuit boards that can be bent to fit multiple installation solutions. With magnetic splicing design, they are ideal for large-area LED lighting applications.
- ❖ Deliver stable lumen output with even light distribution and zero flicker.
- ❖ Especially suitable for venues requiring high color rendering, such as shopping malls, reception lounges, etc.

❖ APPLICATION AREA




- ❖ Mall, large advertising display
- ❖ High-grade LED advertising, display card
- ❖ High-end supermarket display shelves, traffic light layout

SUMMARY

❖ PCB size	490*245mm
❖ Voltage	24V
❖ Color	White
❖ LED Q'ty	72pcs

CERTIFICATION

The certification types will be increased as needed. You can contact our company's salesperson to learn more.

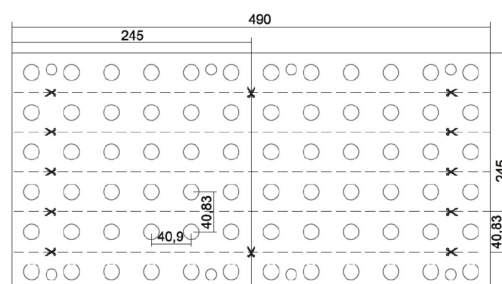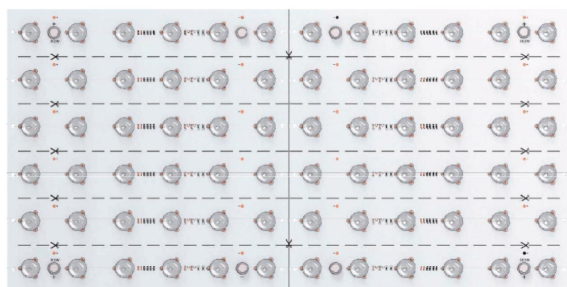

ITEM		MODEL
		LM-LED-FLS-24V-490245-2835-72
LED Features	Size	490*245mm
	LED Q'ty	72Pcs
	Lamp bead (center) spacing	40.9mm
	LED Part No	LED2835
	LED Chip No	--
	LED current	60mA
	Tc (K) Or Wavelength λd (nm)	6000K-6500K
	LED Color	White
	LED lumen	65LM
Technical Request	Working environment	-20~50 30%-70%
	storage condition	-20~50 30%-70%
	Work frequency	50/60Hz
	Work voltage range	24±0.5V
	Max input current	475±10%mA
	Output power	11.4±10%W
	LED Lumen	920±10%LM

描述

特征

新款LED模组板，采用超薄柔性线路板，可弯曲适合多种安装方案，采用磁吸式拼接，适用于大面积的LED照明应用。

稳定的输出流明，光线均匀，无闪烁

特别适合需要高显色的场所，如商场会客厅等

可裁切，可拼接，可弯曲，提供各种空间的形状的解决方案

概要



❖ 产品尺寸	490*245mm
❖ 电压	24V
❖ 颜色	白色
❖ 灯珠数量	72颗

应用领域

- ❖ 照明发光
- ❖ 灯箱应用
- ❖ 高档LED广告、展示牌光源

认证

认证种类将会增加，请联系本公司业务。

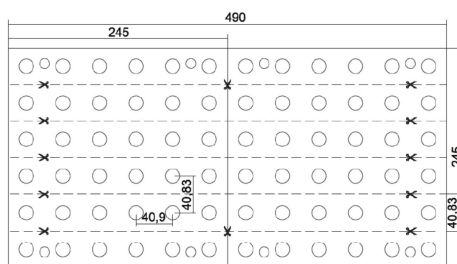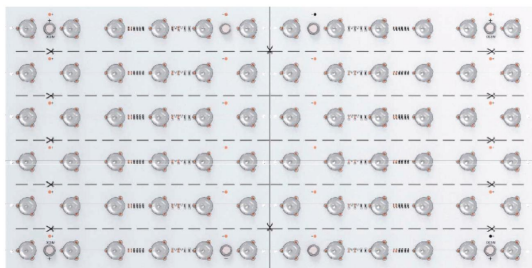

说明		型号
		LM-LED-FLS-24V-490245-2835-72
LED参数	模组尺寸	490*245mm
	灯珠数量	72 pcs
	灯珠(中心)间距	40.9mm
	LED 型号	2835
	LED 芯片	—
	LED 电流	60mA
	LED 波长或(波长)	6000K-6500K
	LED 颜色	正白
	LED 流明	65LM
光学参数	工作环境温湿度	-20~50 30%-70%
	储存条件温湿度	-20~50 30%-70%
	工作频率	50/60Hz
	工作电压范围	24±0.5V
	输入电流	475±10%mA
	功耗	11.4±10%W
	LED 流明	920±10%LM