

DESCRIPTION

❖ CHARACTERS

The LED dynamic light strip adopts high quality intelligent chip, which can control the flashing rhythm of the light very well. It is a dynamic light strip satisfied with various pictures, breaking the static pattern and making the picture of the light box move!

❖ APPLICATION AREA




- ❖ Advertising display
- ❖ Mall, large advertising display
- ❖ High-grade LED advertising
- ❖ Advertising light box, specifically for canvas light boxes

SUMMARY

- ❖ PCB size 980*20mm
- ❖ Voltage 12V
- ❖ Color White
- ❖ LED Q'ty 24pcs

CERTIFICATION

The certification types will be increased as needed. You can contact our company's salesperson to learn more.

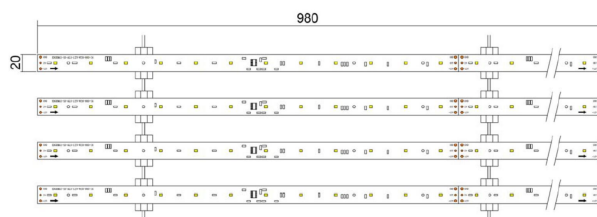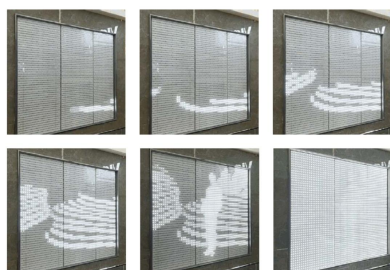

ITEM		MODEL	
		SM-SD-LED-ALS-12V-W20-2835-980-24	
LED Features	LED compound mode	12 Cascade 2 parallel	
	Minimum truncation size	490mm	
	Lamp bead (center) spacing	40.8mm	
	LED Part No	LED2835	
	LED Chip No	--	
	LED current	150mA	
	Tc (k) Or Wavelength λd (nm)	6500K	
	LED Color	White	
	LED lumen	60-65LM	
Technical Request	Working environment	°C	-20~50 30%-70%
	storage condition	°C	-20~50 30%-70%
	Work frequency	Hz	50/60Hz
	Work voltage range	V	12±0.5
	Max input current	mA	457±10%
	Output power	W	2.3±10%
	LED Lumen	LM	13.18±10%

描述

特征

LED 动感灯箱灯条采用了优质智能芯片,非常好地控制灯条闪动的节奏,是一款满足于各种画面的动感灯条,打破静态格局,让灯箱画面动起来!

应用领域




- ❖ 动感广告展示
- ❖ 灯箱应用
- ❖ 高档LED广告

概要

- ❖ 产品尺寸 980*20mm
- ❖ 电压 12V
- ❖ 颜色 白色
- ❖ 灯珠数量 24颗

认证

认证种类将会增加,请联系本公司业务。

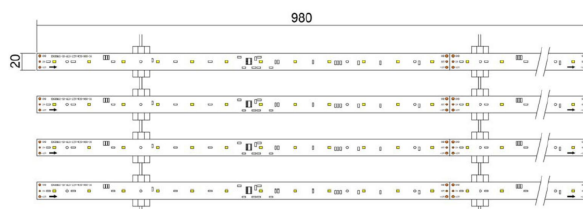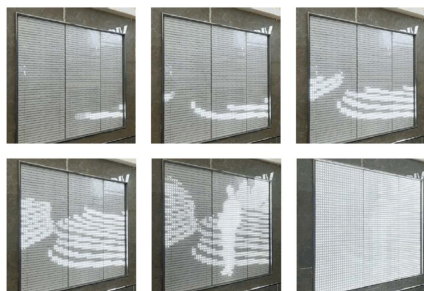

说明		型号	
		SM-SD-LED-ALS-12V-W20-2835-980-24	
LED参数	LED 组合方式	12 串 2 并	
	最小截断尺寸	490mm	
	灯珠 (中心) 间距	40.8mm	
	LED 型号	LED2835	
	LED 芯片	---	
	LED 电流	150mA	
	LED 波长或 (波长)	6500K	
	LED 颜色	白	
	LED 流明	60-65LM	
光学参数	工作环境温湿度	℃	-20~50 30%-70%
	储存条件温湿度	℃	-20~50 30%-70%
	工作频率	Hz	50/60Hz
	工作电压范围	V	12±0.5
	输入电流	mA	457±10%
	功耗	W	2.3±10%
	LED 流明	LM	13.18±10%